

1 3"



: 96510199

: 35 °C
 0,15 m/sec: 35 °C
 Liquid temperature during operation: 20 °C
 : 998.2 kg/m³

: 10700 rpm
 : 2 m³/h
 : 54.42 m
 : CE,UL,CUL
 : ISO9906:2012 3B

DIN W.-Nr. 1.4301
 AISI 304

1.4301 EN
 AISI 304

Rp 1 1/4
 : 76 mm

MS3
 1.02 kW

- 2: 0.7 kW


50 Hz
 : 1 x 200-240 V

Email:


: 0889896897
office@ilva.bg
3.1.2018 .

: 5.2 A
: 1,00
: 10700 rpm
: (IEC 34-5): IP68
(IEC 85): F
: 1.5 m
:
: 4.8 kg
: 5.1 kg
: 0.009 m3
Danish VVS No.: VVS NO 388432455
Finnish: LVI NO 4762601
Norwegian NRF no.: NRF NO 9041341

96510199 SQ 2-55 50 Hz

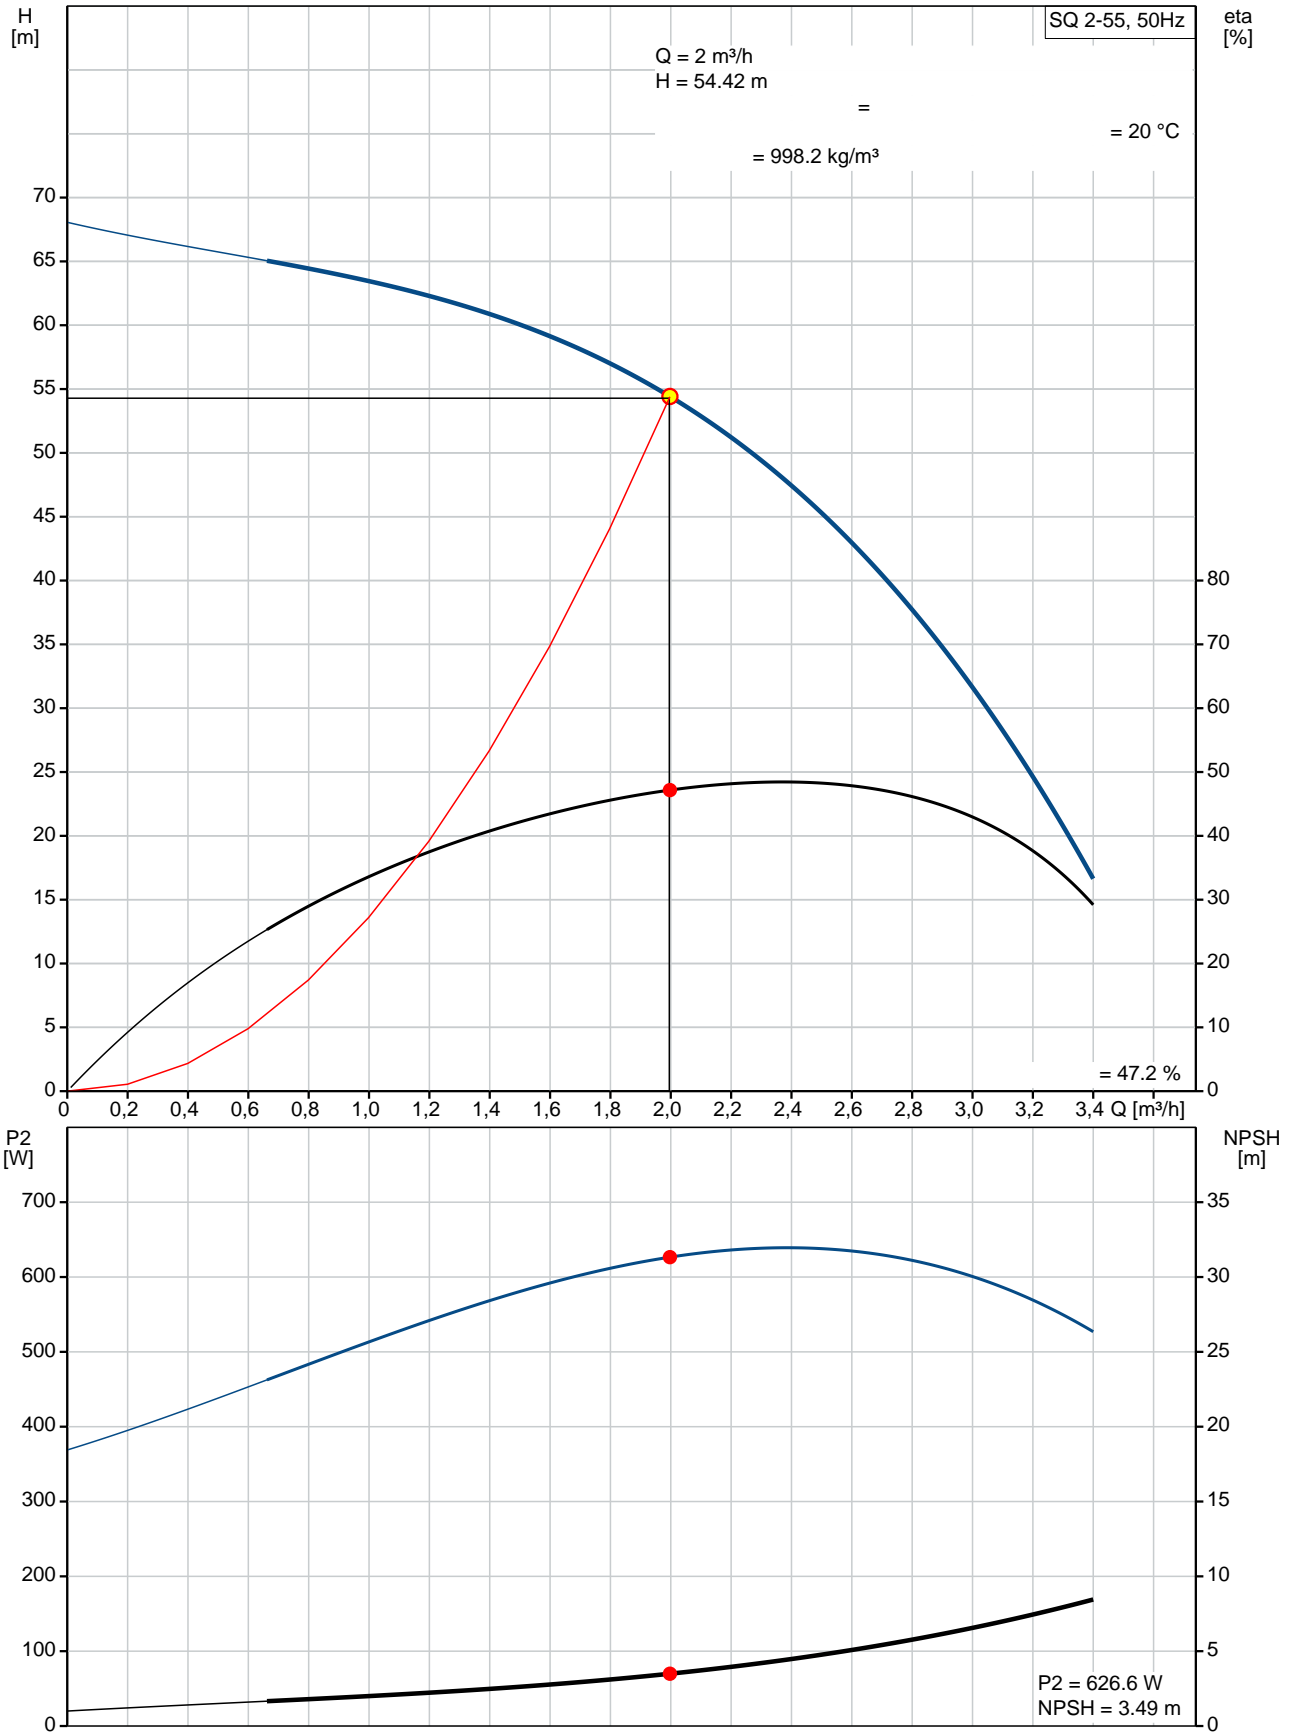


96510199 SQ 2-55 50 Hz

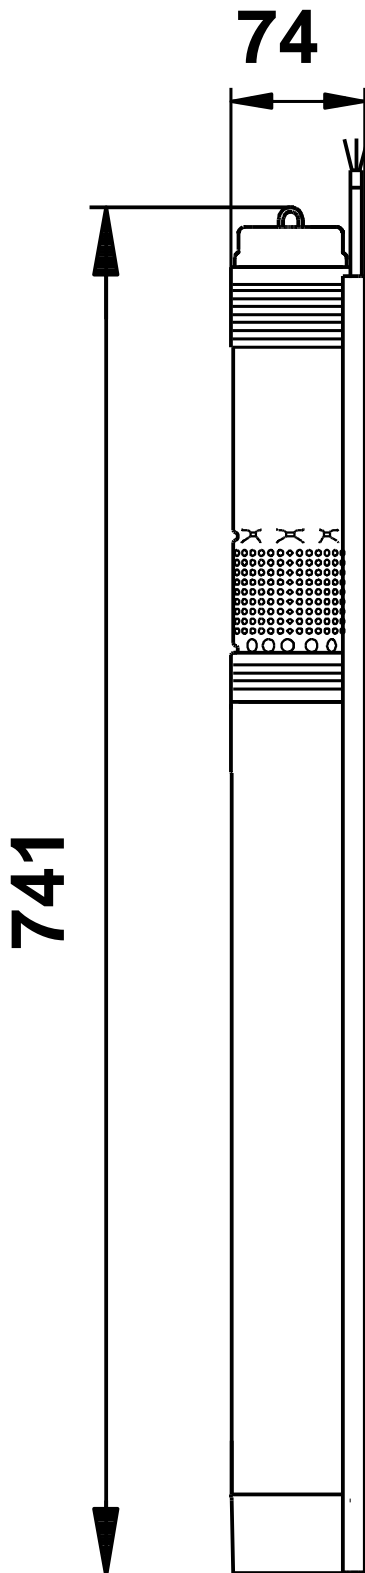

! [mm],

96510199 SQ 2-55 50 Hz

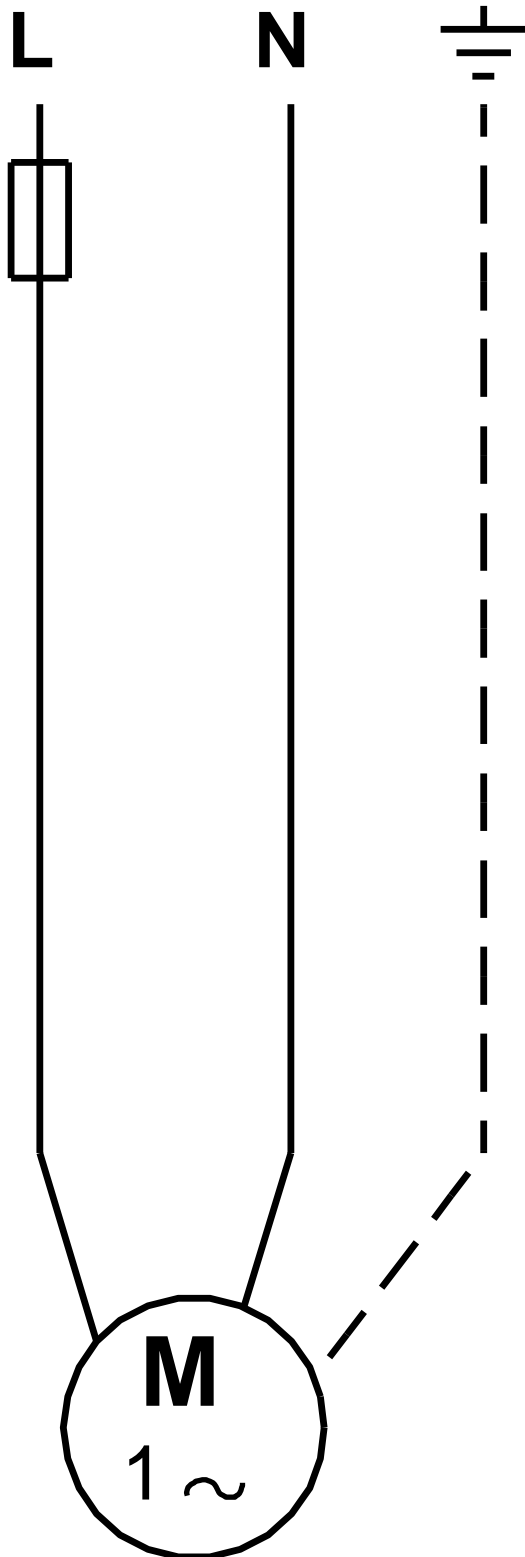

! [mm],