

1 3"



: 96510210

: 35 °C
0,15 m/sec: 35 °C
Liquid temperature during operation: 20 °C
: 998.2 kg/m³

: 10700 rpm
: 3 m³/h
: 113 m
: CE,UL,CUL
: ISO9906:2012 3B

DIN W.-Nr. 1.4301
AISI 304

1.4301 EN
AISI 304


Rp 1 1/4
: 76 mm

: MS3
- 1: 2.54 kW
- 2: 1.85 kW


: 50 Hz
: 1 x 200-240 V

: 12.3 A
: 1,00
: 10700 rpm
: (IEC 34-5): IP68
(IEC 85): F
: 1.5 m
:
: 6.5 kg
: 7.1 kg
: 0.011 m3
Danish VVS No.: VVS NO 388433505

96510210 SQ 3-105 50 Hz

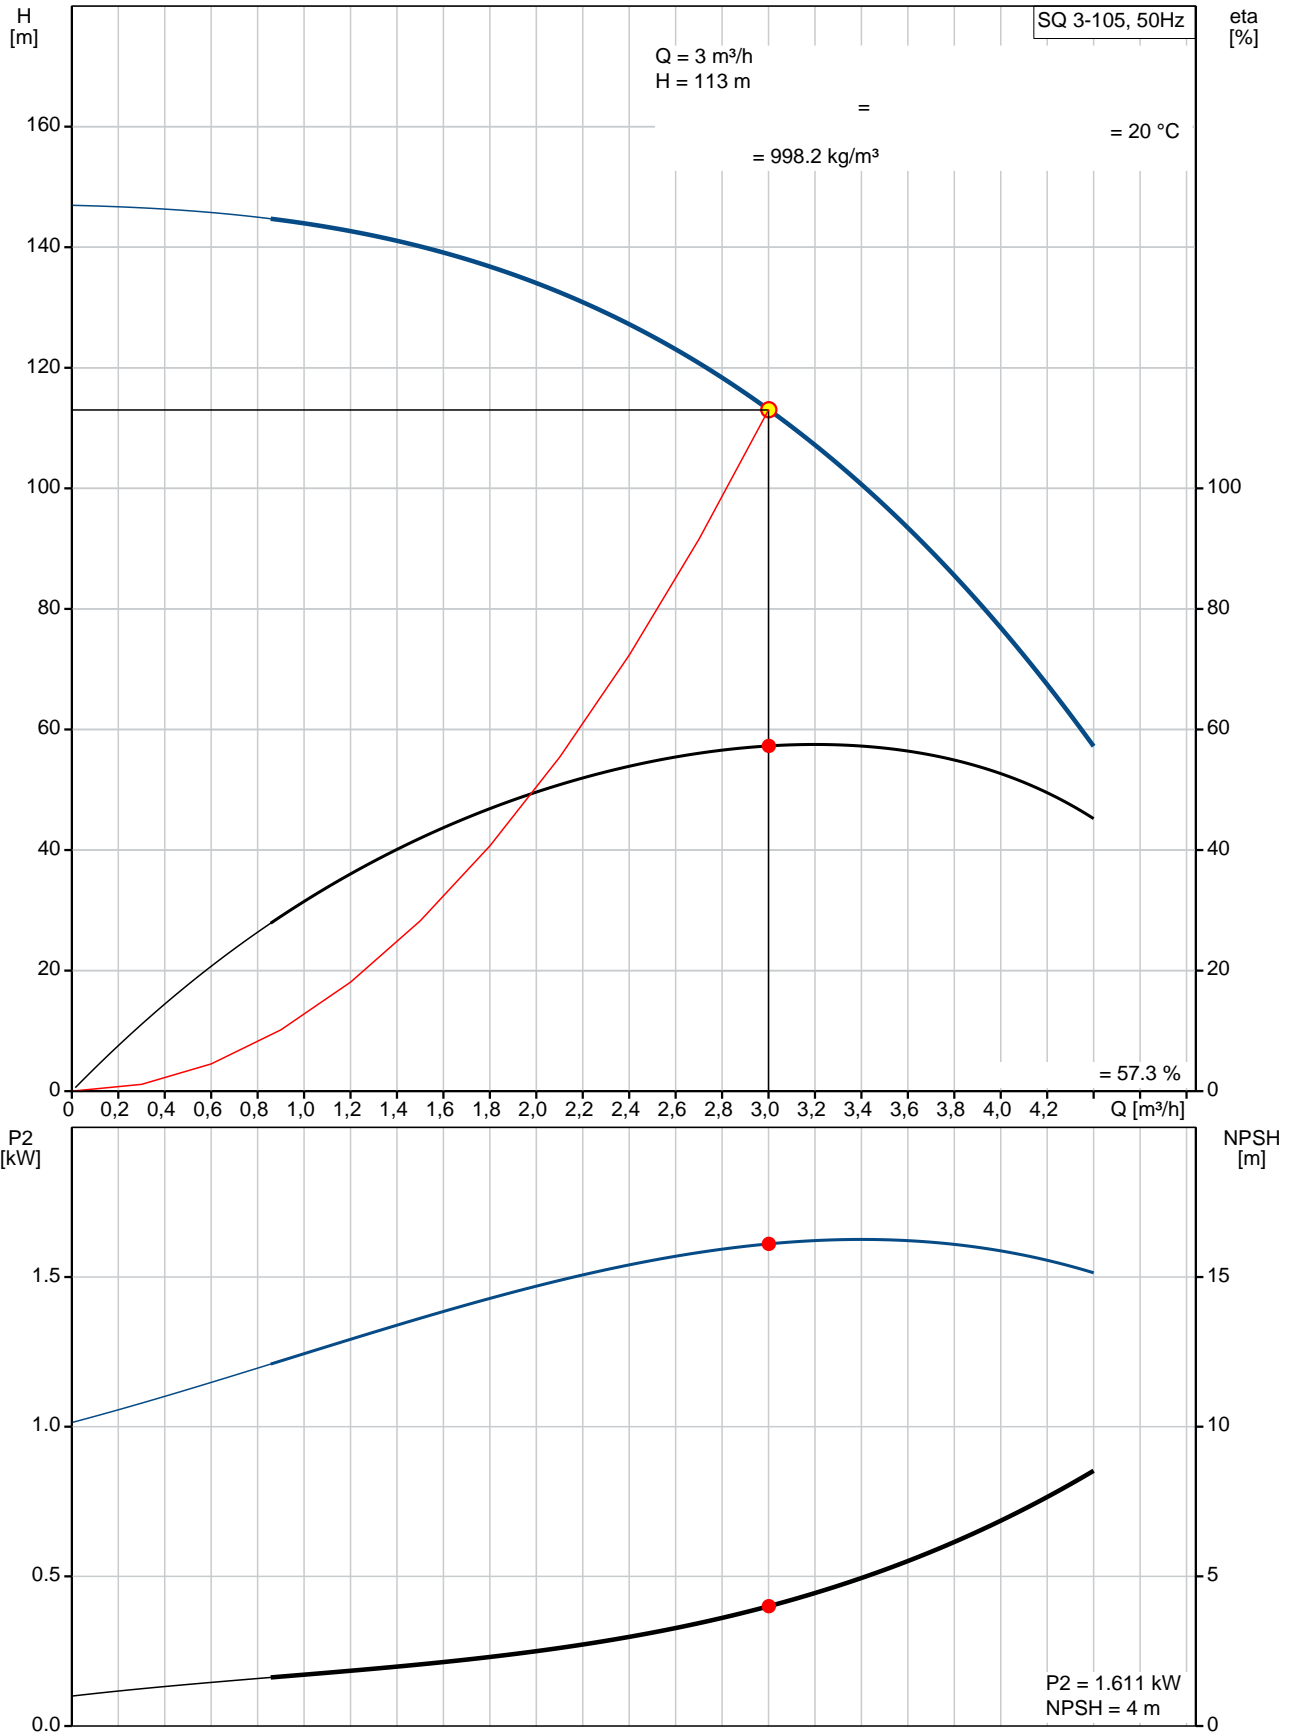


96510210 SQ 3-105 50 Hz

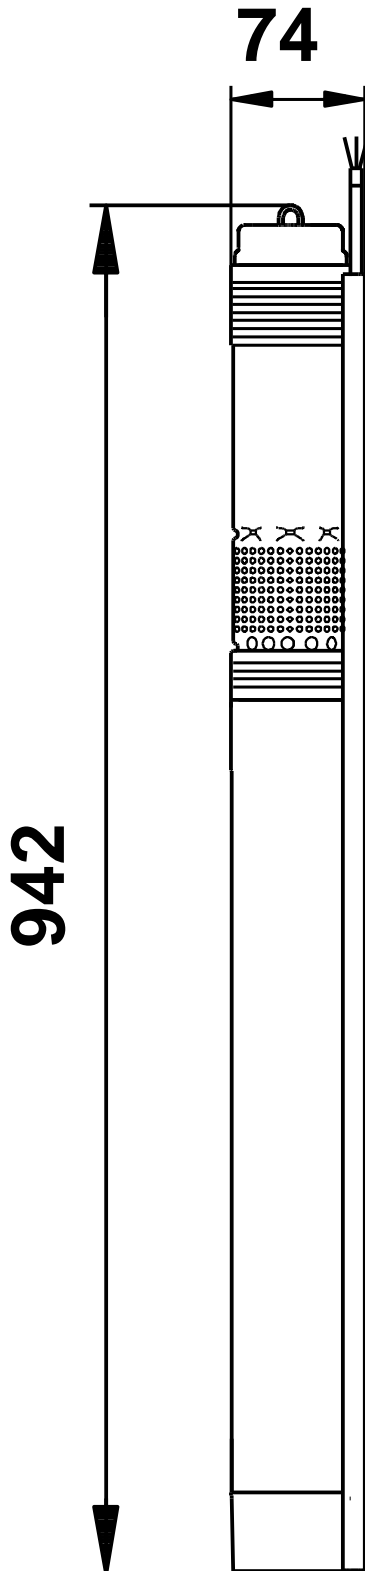

! [mm],

96510210 SQ 3-105 50 Hz

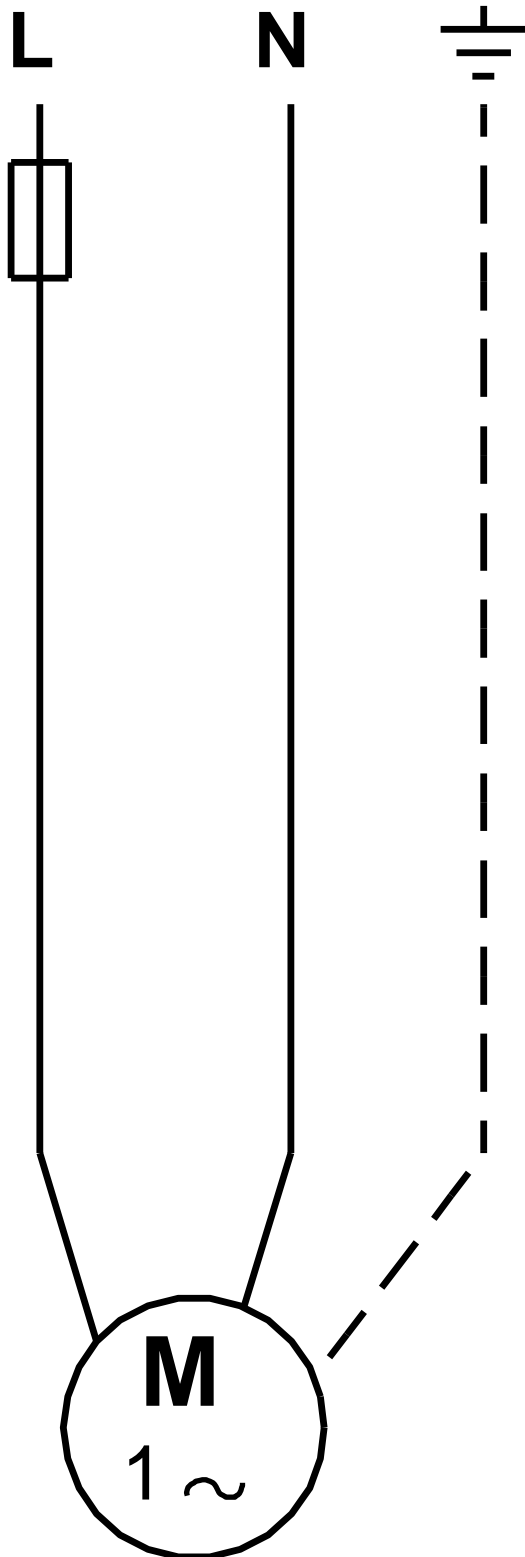

! [mm],