

1 3"



: 96510206

: 35 °C
0,15 m/sec: 35 °C
Liquid temperature during operation: 20 °C
998.2 kg/m³

: 10700 rpm
: 3 m³/h
: 56.45 m
: CE,UL,CUL
: ISO9906:2012 3B

DIN W.-Nr. 1.4301
AISI 304

1.4301 EN
AISI 304

Rp 1 1/4
: 76 mm

MS3
1.65 kW

- 2: 1.15 kW


50 Hz
1 x 200-240 V

Email:


: 0889896897
office@ilva.bg
5.1.2018 .

: 8.4 A
: 1,00
: 10700 rpm
: (IEC 34-5): IP68
(IEC 85): F
: 1.5 m
:
: 5.4 kg
: 6.1 kg
: 0.009 m3
Danish VVS No.: VVS NO 388433455
Norwegian NRF no.: NRF NO 9041323

96510206 SQ 3-55 50 Hz

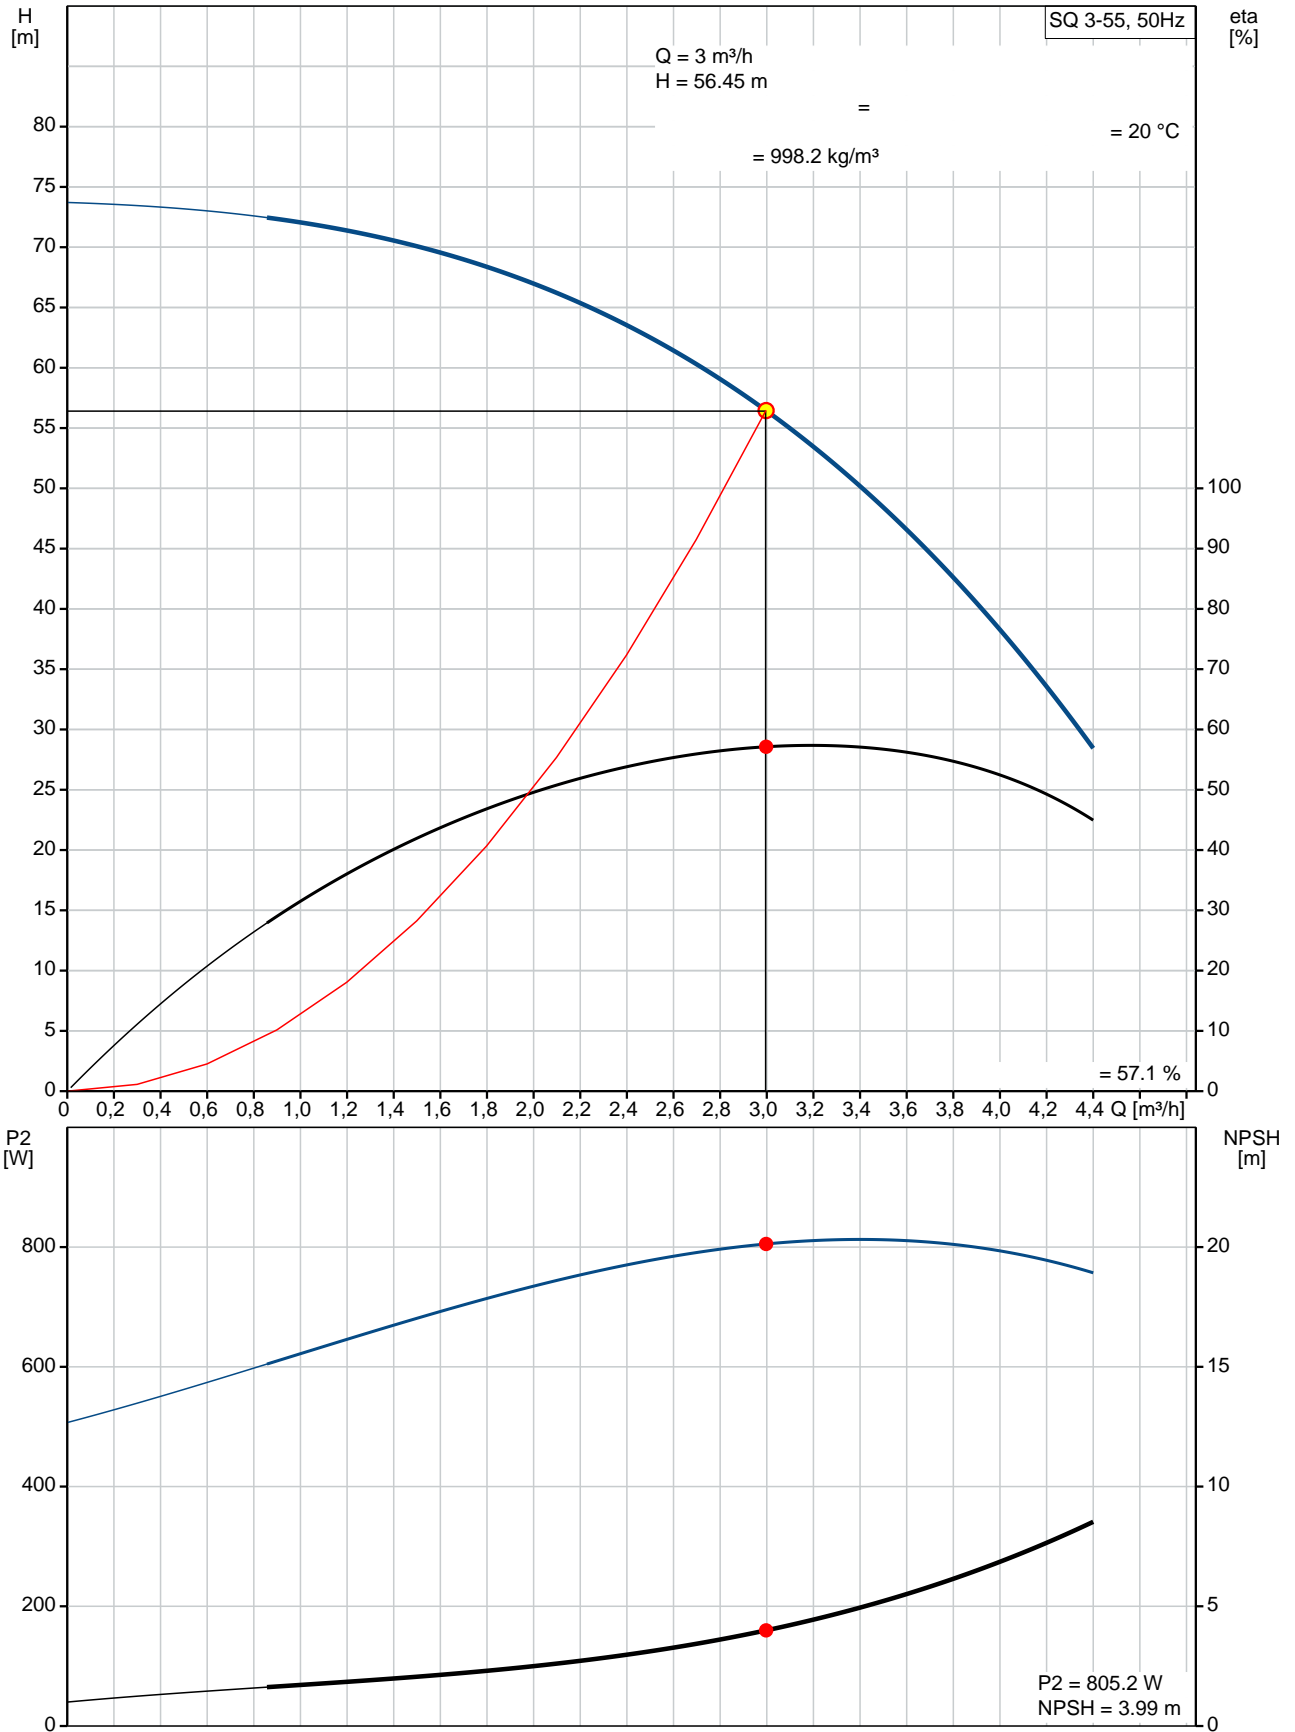


96510206 SQ 3-55 50 Hz

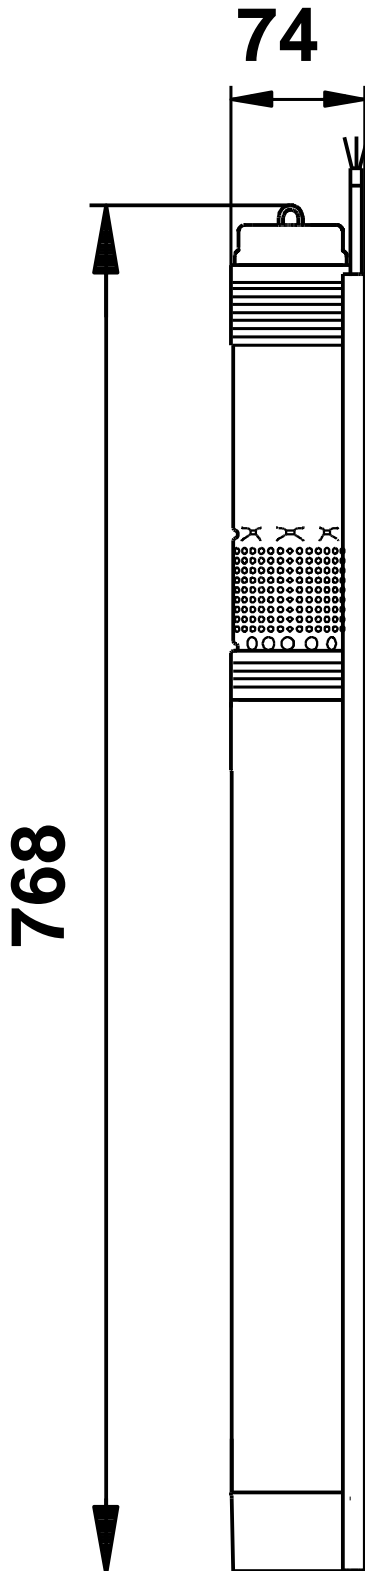

! [mm],

96510206 SQ 3-55 50 Hz

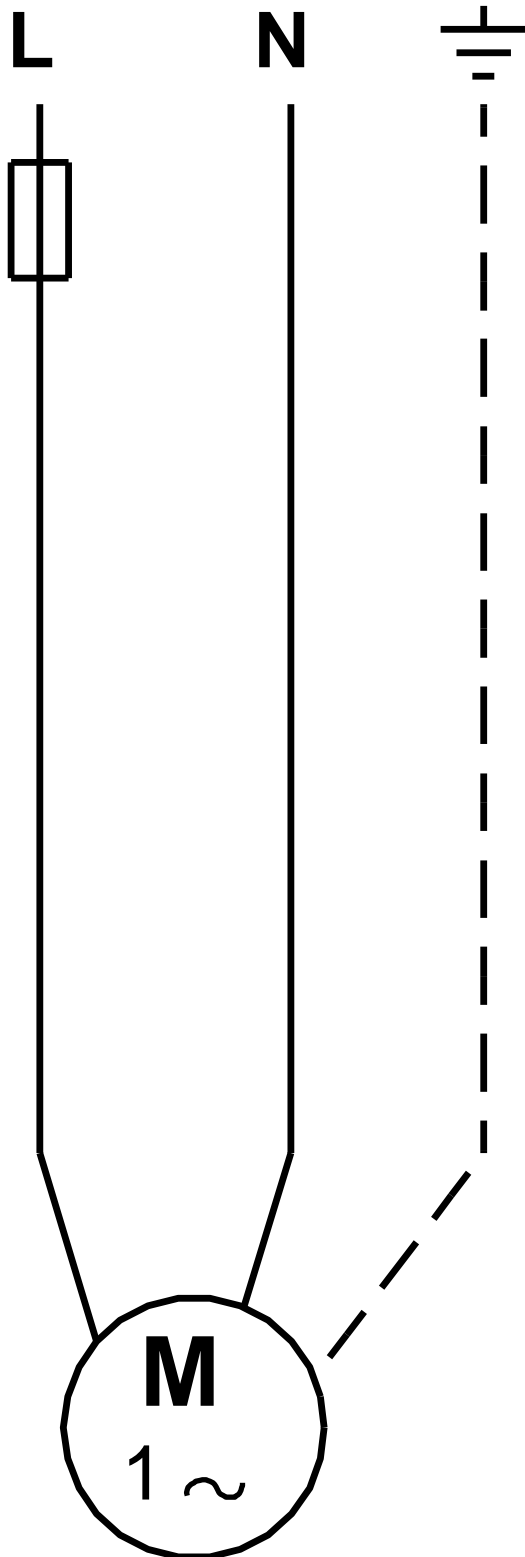

! [mm],